


# CS52D

## 2-Port Hybrid DVI KVM Switch with Audio

### Diagram

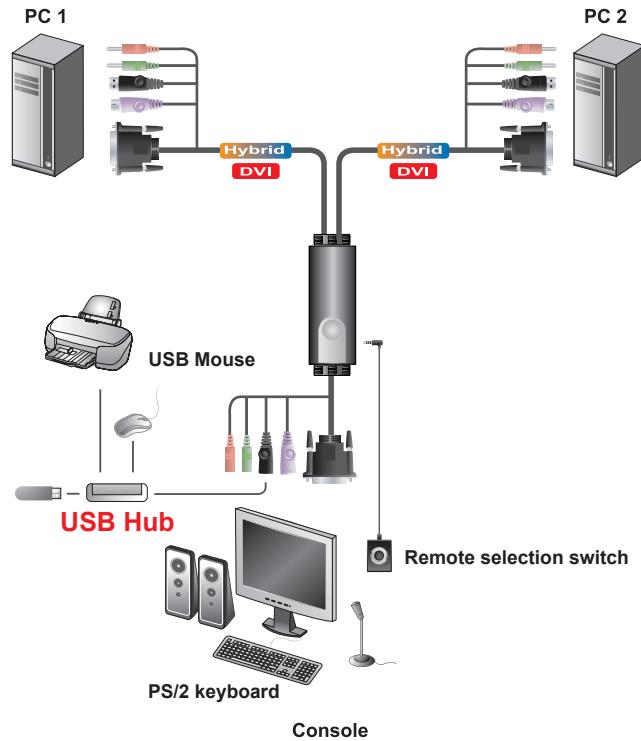

Console PS/2, USB	Computers PS/2, USB	DVI	OS Support Win, Linux, FreeBSD
Audio Mic & Speaker	Non-Powered	Multi-function mice	NEW OS Support Vista

### Features

- One console (DVI monitor, PS/2 keyboard, and USB mouse) controls two computers
- Fully DVI-Digital specification compliant
- Remote port selection switch for convenient switch placement
- Supports multi-function mice
- USB 2.0 connector for USB peripheral sharing
- Audio (microphone and speaker) enabled -full bass response provides a rich experience for 2.1 surround sound systems
- Independent switching of the KVM and Audio focus- one computer can have the KVM focus while the other has the audio focus
- Superior video quality- up to 1600x 1200@60Hz; DDC2B
- Auto Scan function to monitor computer operation
- Non-powered

### Specifications

Function		CS52D
Computer Connections		2
Port Selection		Hotkey, Pushbutton
Connectors	Console Ports	Keyboard 1 x 6-pin Mini-DIN Female (Purple) Video 1 x DVI Male (Black) Mouse 1 x USB Type A Female (Black) Speaker 1 x Mini Stereo Jack Female (Green) Microphone 1 x Mini Stereo Jack Female (Pink)
	KVM Ports	Keyboard 2 x 6-pin Mini-DIN Male (Purple) Video 2 x DVI Male (Black) Mouse 2 x USB Type A Male (Black) Speaker 2 x Mini Stereo Plug Male (Green) Microphone 2 x Mini Stereo Plug Male (Pink)
Remote Switch		1 x Mini Stereo Jack
Switches		Port 1 x Pushbutton
LEDs		Selected 2 (Green)
Cable Length	Console	KB/Mouse 0.15m Video 1.2m
	Computers	0.6m, 1.2m
Emulation		Keyboard PS/2
Video		1600 x1200 @60Hz; DDC2B
Scan Interval		3, 5, 10, 20 Seconds
Environment	Operation Temp.	0-50°C
	Storage Temp.	-20-60°C
Physical Properties	Humidity	0 - 80% RH, Non-condensing
	Housing	Plastic
	Weight	0.61 kg
Dimension (L x W x H)		8.45 x 3.40 x 2.13 cm

\* The specifications and pictures are subject to change without notice.