


# VS-231/ VS-431

## 2/4 Port HDTV A/V Switch



The 2 port VS-231 and 4 port VS-431 make plugging and unplugging devices a thing of the past. These high quality component video (YPbPr) switches with on-board stereo audio are perfect for HDTV enthusiasts who want to add more inputs to their high-definition display. Use the VS-231 to effortlessly connect a DVD player and set-top box or satellite receiver to your HDTV or projector. Or, for the home theatre buff, the VS-431 provides a complete switching solution. The IR remote is an added convenience, allowing you to enjoy multimedia switching from the comfort of your seat.



### Front View

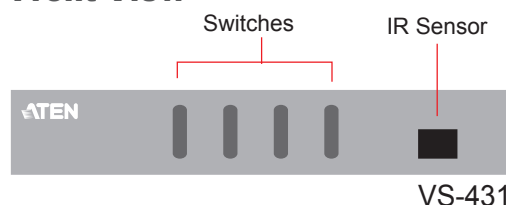

### Rear View

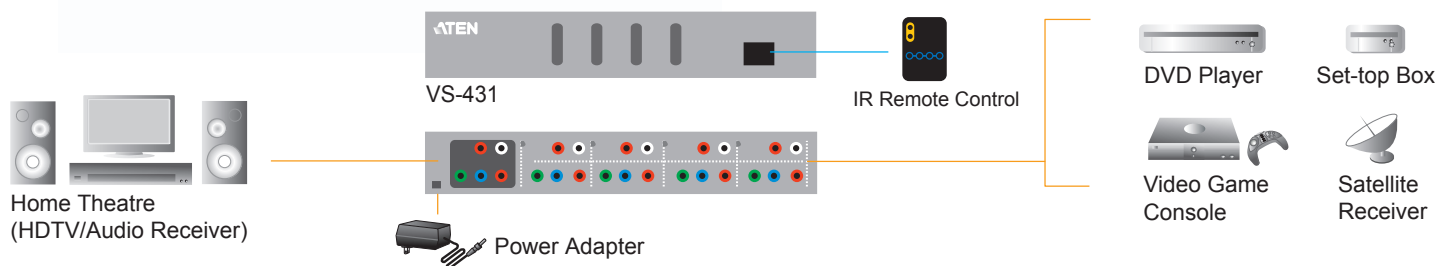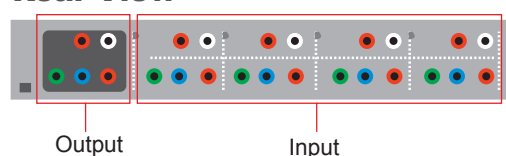

### Features

- Displays the video output of two or four digital devices on a single high definition monitor or projector
- Stereo audio support
- Complete home theater switching solution
- Quick and easy switching via front panel push button(s) or IR remote control
- Seamless electronic switching for greater reliability and durability
- 250MHz video bandwidth
- Easy installation

### Specifications

Function	VS-231	VS-431
Device Connections	2	4
Port Selection	Push Buttons, IR Remote Control	
Connectors	Input	Video
		Y 2 x RCA Female (Green) 4x RCA Female (Green)
		Pb 2 x RCA Female (Blue) 4 x RCA Female (Blue)
		Pr 2 x RCA Female (Red) 4 x RCA Female (Red)
	Audio	L 2 x RCA Female (White) 4 x RCA Female (White)
		R 2 x RCA Female (Red) 4 x RCA Female (Red)
	Output	Video
		Y 1 x RCA Female (Green)
		Pb 1 x RCA Female (Blue)
		Pr 1 x RCA Female (Red)
Power	Power	Audio
		L 1 x RCA Female (White)
		R 1 x RCA Female (Red)
	1 x DC Jack	
LEDs	Online	2 (Orange)
	Selected	4 (Orange)
Buttons	Port Selection	2 (Green)
	Port Selection	4 (Green)
Power Consumption	DC 5.3V, 0.8W	
Video	1600 x 1200 @ 60Hz; DDC2B and 480p, 720p, 1080i, 1080p	
Video Bandwidth	250MHz	
Environment	Operating Temperature	0°~50°C
	Storage Temperature	-20°~60°C
	Humidity	0~80% RH, NC
Physical Properties	Housing	Metal
	Weight	0.65 kg
	Dimensions (LxWxH)	0.85 kg
		20 x 7.5 x 4.5 cm
		26 x 7.5 x 4.5 cm

\* Specifications are subject to change without notice

**Headquarters**  
**ATEN International CO., Ltd.**  
 3F, No.125, Sec. 2, Datung Rd, Sijhih City, Taipei 221, Taiwan  
 Tel: 886-2-8692-6789 Fax: 886-2-8692-6767  
<http://www.aten.com> E-mail : sales@aten.com.tw

**USA Branch Office:**  
**ATEN Technology Inc.**  
 Tel: 1-949-428-1111 Fax: 1-949-428-1100  
<http://www.aten-usa.com>  
 E-mail : sales@aten-usa.com

**Belgium Branch Office:**  
**ATEN Infotech N.V.**  
 Tel: 32-11-531543 Fax: 32-11-531544  
<http://www.aten.be>  
 E-mail : sales@aten.be

**Japan Branch Office:**  
**ATEN Japan CO., Ltd.**  
 Tel: 81-3-5323-7170 Fax: 81-3-5323-2181  
<http://www.atenjapan.jp>  
 E-mail : sales@atenjapan.jp