

24 / 16 Ports Switches

10/100Mbps Fast Ethernet
19" Rackmount Size



ES-3124RL / ES-3116RL


✓ RoHS Compliant

General Description

The device is a powerful, high-performance Fast Ethernet switch, with all 24 / 26 ports capable of 10 or 100Mbps auto-negotiation operation (N-Way) which means the switch could automatically negotiate with the connected partners on the network speed and duplex mode. It is ideal for micro-segmenting large networks into smaller, connected subnets for improved performance, enabling the bandwidth demanding multimedia and imaging applications. Moreover, the 10/100Mbps auto-sensing ability provides an easy way to migrate 10Mbps to 100Mbps network with no pain. Compared to the shared 10Mbps or 100Mbps networks, the switch delivers a dedicated 10/100Mbps connection to every attached client with no bandwidth congestion issue. Store-and-forward switching mode promises the low latency plus eliminates all the network errors, including runt and CRC error packets. To work under full-duplex mode, transmission and reception of the frames can occur simultaneously without causing collisions as well as double the network bandwidth. The switch is plug-n-play without any software to configure and also fully compliant with all kinds of network protocols. Moreover, the rich diagnostic LEDs on the front-panel provide the operating status of individual port and whole system.



USB VOIP Gateway Box

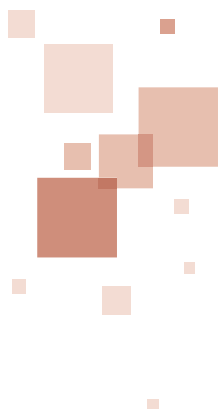

Taiwan / Headquarters

Edimax Technology Co., LTD.
TEL:886-2-7739-6888
FAX:886-2-7739-6887
sales@edimax.com.tw

Europe

Edimax Technology Europe B.V.
TEL:31-499-377344
FAX:31-499-372647
sales@edimax.nl

U.K.

Edimax Technology (UK) Ltd.
TEL:44-870-7740226
FAX:44-870-7740227
info@edimax.co.uk

Poland

Edimax Technology Europe
B.V. SP. Z O.O.
Tel: +48(22)-6079-480
Fax: +48(22)-6079-481
sales@edimax.nl

U.S.A.

Edimax Computer Company
TEL:1-408-496-1105
FAX:1-408-980-1530
sales@edimax.com

Latin America

TEL:1-786-845-8099
FAX:1-786-331-8490
sales_latina@edimax.com

China

TEL:8610-6213-9288
FAX:8610-6213-9231

Key Features

- Complies with 10Base-T and 100BASE-TX specifications
- RJ-45 ports for 100Base-TX and 10Base-T connectivity
- Supports N-Way protocol for speed (10/100Mbps) and duplex mode (Half/Full) auto-detection
- Supports MDI/MDI-X auto crossover
- Supports full and half duplex operation on all ports
- Supports back-pressure (half duplex) and flow control (802.3x)
- Wire-speed packet filtering and forwarding rate
- Store & forward architecture filters fragment & CRC error packets
- Supports 8K MAC entries
- 160K bytes buffer memory
- Supports extensive LED indicators for network diagnostics
- 19-inch standard rack-mountable design
- Internal universal switching power supply
- FCC Class A, VCCI Class A , CE

Product Specifications

Standard	IEEE802.3, IEEE802.3u and IEEE802.3x standards
Interface	10/100Mbps RJ-45 NWay ports
NWay Protocol Support	Network speed: 10Mbps and 100Mbps Duplex mode: Full and Half
Buffer Memory	160K bytes for the whole system
Filtering/Forwarding Rate	10Mbps: 14,880pps/14,880pps 100Mbps: 148,800pps/148,800pps
Emission	FCC Class A, VCCI Class A, CE
Rich LED indicators	System: Power Port: Link/Act
Operating Temperature	00- 400C (320- 1040F)
Operating Humidity	10% ~ 90% (non-condensing)
Dimension	441 x 130 x 44 mm
Power Supply	3.3V 4A (100 ~ 240VAC, 50~60 Hz)