



IC-7000PT

Fast Ethernet Dual Mode Pan/Tilt Internet Camera With 1.3M Pixels Lens



Supports motorized Pan/Tilt

IC-7000PT features motorized Pan and Tilt with a viewing angle $\pm 355^\circ$ horizontally and $\pm 120^\circ$ vertically. Users can view and control remotely via a browser or Edimax utility to monitor a wider range than normal Internet camera. It can be preset a specific angle to make the camera focus on this point accurately and quickly.

Allows multi users login simultaneously

This Internet Camera (IP Camera) allows multi users login to view the live video streaming simultaneously. The advanced video compression (M-JPEG: SXGA, VGA, QVGA and MPEG4: SVGA, VGA, QVGA) produces a high quality and high frame rate video streaming.

Supports M-JPEG and MPEG4 dual modes

Supports dual-mode video compression. You can choose M-JPEG mode or MPEG4 mode according to your network settings in order to achieve the highest video quality or faster video transmission.

Supports multi areas motion detection

The IC-7000PT is a powerful mobile surveillance system. With the intelligent multi-area motion detection function, it monitors your home, pets or business effectively. You can pre-determine 3 trigger areas in the viewing area. Whenever motion is detected in these areas, the camera takes a snapshot automatically and sends the picture of the events to email or ftp server.

Supports 2-way audio

Includes an audio output for speaker connection and microphone, users can speak to remote site through web browser and listen the sound from the remote site.

Built in SDHC/SD card slot to store recording files locally

Users can save the snapshot photos and the recorded video files locally to a SDHC or SD memory card. It gives the double secure once the Internet is disconnected so the snapshot cannot be sent to email or FTP.

Supports DDNS* and UPnP

The DDNS feature allows Internet users to view IC-7000PT by typing a memorable URL (like www.edimax.com) to a browser, rather than an IP address. It gives users less effort to remember the numeric IP address and DDNS is the solution for whom not having a fixed public IP address. UPnP allows Windows XP (how about Vista) users access the Internet camera with a mouse click, no IP address needed.


*Users need to register with a DDNS server



FEATURES AND SPECIFICATIONS

Software Features

- Supports MPEG4 and M-JPEG video streaming
- Supports motorized Pan/Tilt with a viewing angle ($\pm 355^\circ$ horizontally and $\pm 120^\circ$ vertically)
- Supports multiple profile to output MPEG4 and M-JPEG at the same time
- Supports multi areas motion detection and snapshot to email and FTP
- Includes 16-channel view and record utility to views up to 16 cameras simultaneously
- Manual/Schedule/Cycle recording and Playback/Forward/Pause/Stop video with the utility
- Supports 2-way audio
- Built-in SDHC/SD card slot to store snapshots and recorded video locally to a SDHC/SD memory card
- Supports 4 additional user login accounts
- High speed hardware based compression
- Supports Windows 2000/XP/Vista
- Firmware upgradable

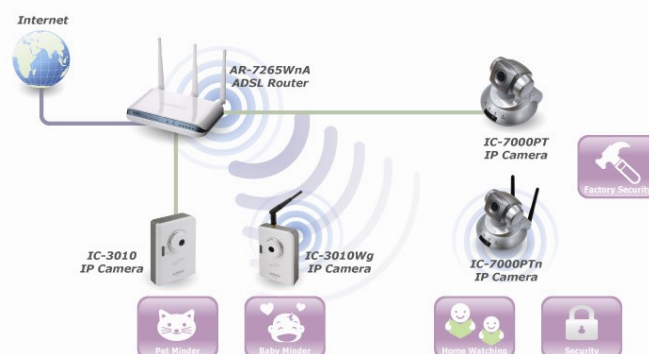

Hardware Specifications

Model NO.	IC-7000PT
CPU+DSP	Prolific PL-1029
Flash	4MB Flash
RAM	32MB SDRAM
Image Sensor	Micron MI-1320 1.3M Pixels CMOS Sensor
Lens	5 mm, Manual Focus, F=2.8
LAN Port	10/100M UTP Port x 1
Power	12V DC, 1A Power Adaptor
Dimension	108mm x 112mm x 108mm
Temperature	0~45°C
Humidity	10~90% (Non-Condensing)
Certification	FCC Class B, CE Mark