



PS-3103P

Three Port Print Server (Desktop Size) 3 Printer Port + 1 10/100M Ethernet Port

Easy Installation and Configuration (Web Based)

The print server's easy-to-use windows installation wizard allow for quick installation and setup. The print server can also be conveniently configured from any network client that support web-browsing.

Supports Peer-to-Peer and Server-Based Printing

Supports both Peer-to-Peer and Server-based printing. LAN clients can connect directly with the print server to execute printing jobs (Peer-to-Peer printing); or clients can send print jobs first to a server (queuing jobs) and allow the server to connect with the print server to execute the printing jobs (Server-based printing).

Provides Complete Printing Methods

The print server provides LPR, IPP, SMB/TCP, Email Printing, Raw Printing and Unix Logical Printer printing methods. You can choose the best printing method according to your environment.

Supports Major Operating Systems

The print server is compatible with all major operating systems used today, for example Windows 95 / 98 / Me / NT / 2000 / XP, NetWare (3.x above), MAC OS and Unix/Linux environments.

Supports DHCP Server/Client


The printer server can act as a DHCP server, allowing your LAN clients to automatically obtain an IP address or it can act as a DHCP client allowing for easy integration to your existing network.

Fault-Tolerant Firmware Upgrades

Users need not worry about errors occurring in the midst of an upgrade, thus preventing the print server from operating. The print server's fault-tolerant upgrade function allows for re-upgrades should problems occur during the initial upgrade.



Print Server

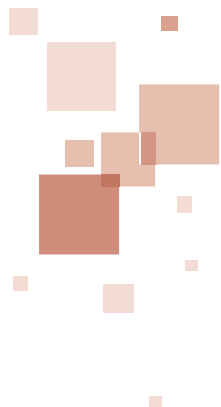

Features

- Provides one 10/100Mbps auto-sensing port that complies with IEEE 802.3 and 802.3u standards
- Provides three parallel printer ports that can connect to three printers
- Supports TCP/IP, IPX/SPX, NetBEUI, AppleTalk network protocols
- Supports LPR, IPP, SMB/TCP, Email Printing, Raw Printing, Unix Logical Printer
- Supports Peer-to-Peer Printing (TCP/IP/IPX/NetBEUI/AppleTalk)
- Supports Server-based printing (Novell NetWare and Windows)
- Compatible with all major operating systems (Windows 95/98/Me/NT/2000/XP, NetWare (3.x above), MAC OS and Unix/Linux)
- Supports DHCP (both client and server) protocol
- Efficient print job transfer using DMA (Direct Memory Access).
- Supports bi-directional capability, able to get information from printers
- Supports Web-based management, Windows Configuration Utility, SNMP Protocol
- Provides easy-to-use installation, setup and diagnostic programs.
- Provides flash memory for convenient software upgrades.
- Supports Fault-Tolerant Upgrade capability
- Supports JetAdmin management tools

Specification

Product	PS-3103P
CPU	RDC 1610
Super I/O	Attansic AT761F x 3
PHY	Altima AC101LKQT
Flash	512 KB NOR Flash
RAM	2 MB SDRAM
Printer Port	DB-25 x 3
LAN Port	10/100M UTP Port x 1
Power	12V DC, 1.25A Switch Power Adaptor
Dimension	30(H)*187(W)*100(D) mm
Temperature	10~40 °C
Humidity	10~90% (Non-Condensing)
Certification	FCC Class B, CE Mark, C-Tick

Edimax Worldwide

Taiwan/Headquarters

Edimax Technology Co. Ltd.
TEL : 886-2-22995648
FAX : 886-2-22995647
E-mail : service@edimax.com.tw

China

Beijing Edimax Science
& Technology Co., Ltd.
TEL : 8610-82665568
FAX : 8610-82665325
E-mail : support@edimax.com.cn

USA

Edimax Computer Company
TEL : 1-408-496-1105
FAX : 1-408-980-1530
E-mail : support@edimax.com

Latin America

Edimax Latin America
TEL : 1-786-845 8099
FAX : 1-786-331 8490
E-mail : sales_latinamerica@edimax.com

Europe

Edimax Technology Europe B.V.
TEL : 31- 499-377344
FAX : 31- 499-372647
E-mail : support-europe@edimax.com.tw

England

Edimax Technology (UK) Ltd.
TEL: +44-(0)-1908-255981
FAX: +44-(0)-1908-255700
E-mail : support-uk@edimax.com.tw

