

Enclosure KD2-6



Features

- Polycarbonate dome cover
- Sunshield
- Temperature controlled by microprocessor
- Heating
- Air circulation
- Power 12 V DC or 24 V AC (max. power consumption 1,8 A)
- Power output for camera supply

Operation conditions

Enclosure version	Power supply version	
	12 V DC	24 V AC
H (one heater)	-15° to 60°C	-20° to 60°C
HT (dual heater)	-20° to 60°C	-30° to 60°C


Dimensions

- Dimensions: Ø217×257 mm

How to order

Enclosure version	Transparent	Smoke
	KD2-6T/H (or HT)	KD2-6S/H (or HT)
Mounting \ version	Without Power Supply*	With Power Supply
Wall	KD-BW (KD-BWP)	KD-BWS
Arbor	KD-BA (KD-BAP)	KD-BAS
Corner	KD-BW (KD-BWP), KD-BC	KD-BWS, KD-BC
Pole	KD-BW (KD-BWP), KD-BP	KD-BWS, KD-BP

* Possibly to order PAK-12V

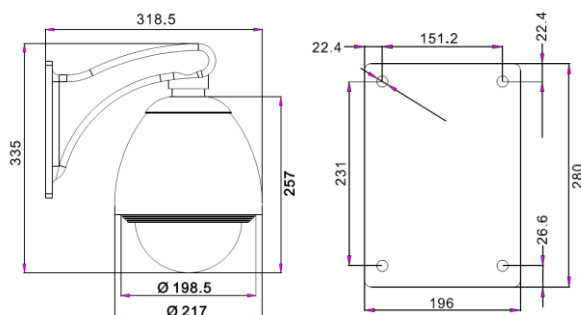

Mount brackets

KD-BW

Wall mount bracket excluding PSU



KD-BWS

Wall mount bracket with PSU (IN 230V, OUT 12 VDC / 24 VAC, 3A)



KD-BAS

Arbor mount bracket with power supply (IN 230V, OUT 12 VDC / 24 VAC, 3A)

