




KRAMER ELECTRONICS, Ltd.  
www.kramerelectronics.com

## VA-1VGA

Computer Graphics Video EDID Emulator



The **VA-1VGA** is an EDID emulator for VGA signals. The unit can store and recall a default EDID setting in non-volatile memory from the display allowing convenient and reliable connection to the source.

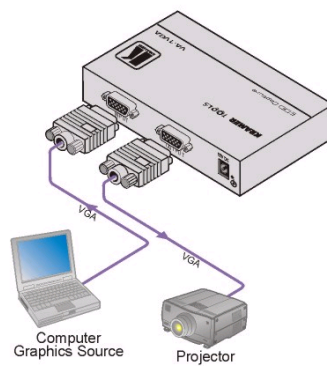



## VA-1VGA

### FEATURES

- Input - 15-pin HD.
- Output - 15-pin HD.
- Bandwidth - 1.8GHz.
- Control - Capture button.
- Compact Kramer **TOOLS™3** units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

### TECHNICAL SPECIFICATIONS

INPUT:	1 XGA input on a 15-pin HD connector
OUTPUT:	1 XGA output on a 15-pin HD connector
MAX. OUTPUT LEVEL:	> 2Vpp
BANDWIDTH (-3dB):	1.8GHz
DIFF. GAIN:	0.02%
DIFF. PHASE:	0.02°
K-FACTOR:	< 0.05%
S/N RATIO:	74dB @ 5MHz (unweighted: 66dB)
CONTROLS:	Push button for EDID monitor information storage
COUPLING:	DC – direct wiring between input and output
POWER SOURCE:	12V DC, 35mA
DIMENSIONS:	6cm x 6.5cm x 3cm (2.4" x 2.6" x 1.2") W, D, H
WEIGHT:	0.15kg (0.33lbs) approx.
ACCESSORIES:	12V DC power supply
OPTIONS:	RK-3T 19" rack adapter.