
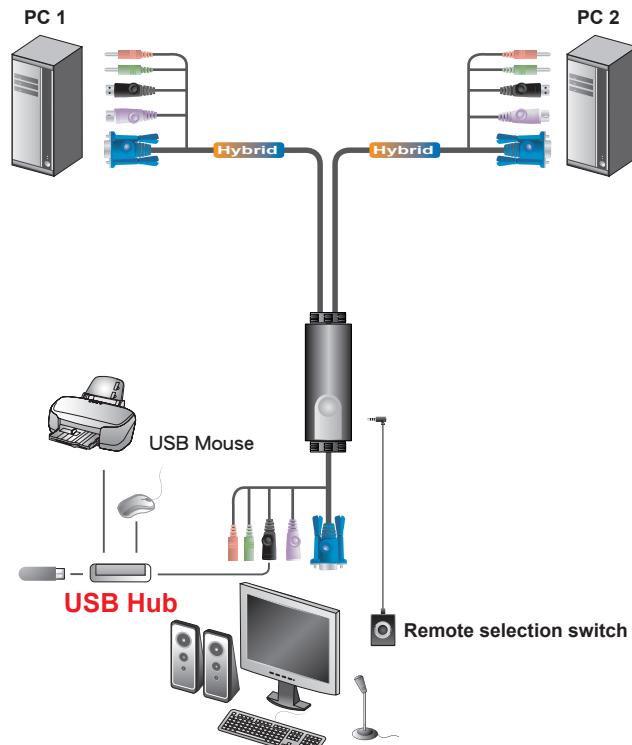


2-Port Hybrid KVM Switch with Audio

Diagram

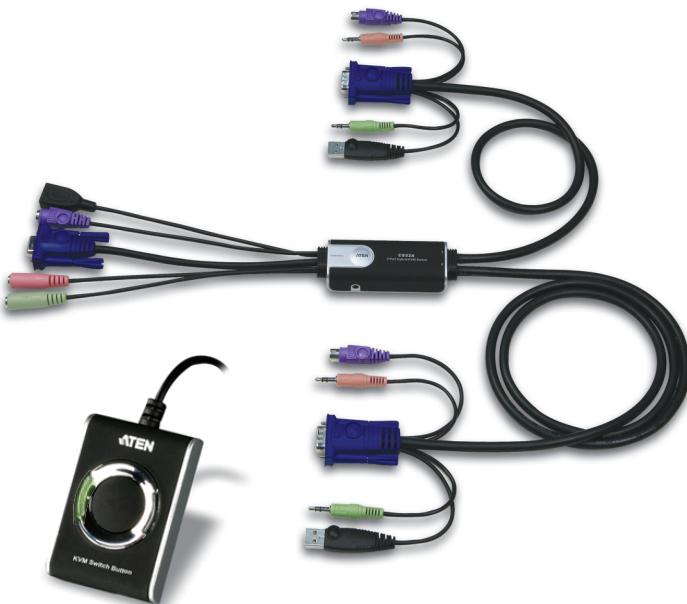

Features

- One console (monitor, PS/2 keyboard, and USB mouse) controls two computers
- Remote port selection switch for convenient switch placement
- Supports multi-function mice
- USB 2.0 connector for USB peripheral sharing
- Audio (microphone and speaker) enabled -full bass response provides a rich experience for 2.1 surround sound systems
- Independent switching of the KVM and Audio focus- one computer can have the KVM focus while the other has the audio focus
- Superior video quality- up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Non-powered

Specifications

Function		CS52A
Computer Connections		2
Connectors	Port Selection	Hotkey, Pushbutton
	Console Ports	Keyboard 1 x 6-pin Mini-DIN Female (Purple) Video 1 x HDB-15 Female (Blue) Mouse 1 x USB Type A Female (Black)
	KVM Ports	Speaker 1 x Mini Stereo Jack Female (Green) Microphone 1 x Mini Stereo Jack Female (Pink) Keyboard 2 x 6-pin Mini-DIN Male (Purple)) Video 2 x HDB-15 Male (Blue) Mouse 2 x USB Type A Male (Black) Speaker 2 x Mini Stereo Plug Male (Green) Microphone 2 x Mini Stereo Plug Male (Pink)
	Remote Switch	1 x Mini Stereo Jack
	Switches	Port 1 x Pushbutton
	LEDs	Selected 2 (Green)
Environment	Cable	Console 0.15m
	Length	Computers 0.6m, 1.2m
	Emulation	Keyboard PS/2
	Video	2048 x 1536; DDC2B
	Scan Interval	3, 5, 10, 20 Seconds
Physical Properties	Operating Temp.	0~50°C
	Storage Temp.	-20~60°C
	Humidity	0 ~ 80% RH, Non-condensing
Physical Properties	Housing	Plastic
	Weight	0.41 kg
	Dimensions (L x W x H)	8.45 x 3.40 x 2.13 cm

* The specifications and pictures are subject to change without notice.